

T440(E)(A3)T

NATIONAL CERTIFICATE DIESEL TRADE THEORY N2

(11040192)

3 April 2019 (X-Paper) 09:00-12:00

This question paper consists of 10 pages.

DEPARTMENT OF HIGHER EDUCATION AND TRAINING REPUBLIC OF SOUTH AFRICA

NATIONAL CERTIFICATE DIESEL TRADE THEORY N2 TIME: 3 HOURS MARKS: 100

INSTRUCTIONS AND INFORMATION

- 1. Answer ALL the questions.
- 2. Read ALL the questions carefully.
- 3. Number the answers according to the numbering system used in this question paper.
- 4. Use only BLUE or BLACK ink.
- 5. Write neatly and legibly.

1.1	Various	options	are	given	as	possib	le a	answers	to	the	follo	wing	qι	uestions.
	Choose	the an	swer	and	write	only	the	letter	(A–	D) r	next	to th	е	question
	number	(1.1.1-	1.1.10) in th	e AN	ISWÉF	R B(OOK.	`	,				•

1.1.1	Which	ONE o	f the	following	symptoms	is	caused	as	а	result	of
	brake d	isc run-	out?								

Δ	Ineffectiveness	of the	hrakas
А	menectiveness	or the	DIAKES

B Rapid wearing of the brake pads

C Localised wearing of the brake pads

D Judder during braking

1.1.2 The torque available at the contact between the driving wheels and the road is known as ... effort.

A tractive

B brake

C clutch

D None of the abovementioned

1.1.3 Incorrect steering axis inclination (S.A.I.) causes ...

A the vehicle to pull to the side of lesser inclination.

B a tendency to assume toe-out orientation.

C poor recovery of the steering wheel after making a turn.

D generation of a braking effect at tight corners.

1.1.4 The vehicle ride will be more comfortable if the ...

A vehicle mass is kept to the minimum.

B sprang mass is kept to the minimum.

C unsprung mass is kept to the minimum.

D All the abovementioned

1.1.5 The cetane rating of diesel fuel is in the order of:

A 45

B 25

C 60

D 70

1.1.6 The compression ratio for diesel engines usually lies in the range of:

A 6–10

B 10–15

C 15-25

D 25-40

- 1.1.7 The main function of the brake fluid is ...
 - A lubrication.
 - B power transmission.
 - C cooling.
 - D None of the abovementioned
- 1.1.8 The basic characteristic(s) of a brake fluid is/are ...
 - A a high boiling point.
 - B low viscosity.
 - C compatibility with rubber and metal parts.
- D ALL the abovementioned
- 1.1.9 The main feature of the MacPherson strut suspension is that the ...
 - A vertical size of the suspension can be made more compact.
 - B non-vertical external forces are supported by the suspension arms.
 - C unsprung mass is lighter.
 - D assembly is slightly more complicated in design.
- 1.1.10 When turning a corner the ...
 - A front wheels are toeing out.
 - B front wheels are turning on different angles.
 - C inside front wheel has a greater angle than the outside front wheel.
 - D ALL the abovementioned

 $(10 \times 1) \qquad (10)$

1.2 FIGURE 1 shows a diagram of the steering geometry. Name the components indicated by writing only the answer next to the letter (A–F) in the ANSWER BOOK.

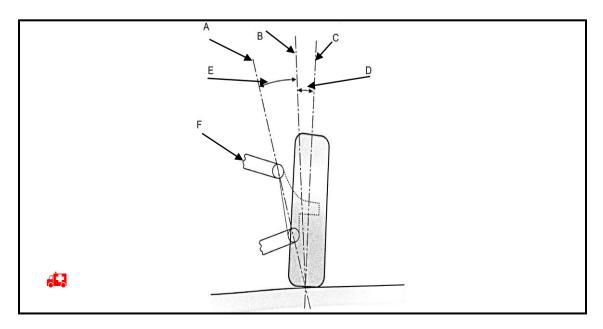


FIGURE 1 (6)

1.3 Explain the following steering geometry terms:

1.3.1 Camber

1.3.2 Included angle

1.3.3 Toe-out on turns

(3 × 2) (6) [22]

QUESTION 2

2.1 Name FOUR types of diesel fuel injector nozzles used on diesel engines. (4)

(2)

2.2 State TWO functions of diesel fuel injectors.

2.3 Give THREE reasons why a copper washer is fitted between the injector tip and the cylinder head on a diesel engine.

(3)

2.4 State FOUR advantages of a diesel engine as compared to a petrol engine.

(4)

2.5 Name TWO basic types of injector pumps used on diesel engines.

(2)

2.6 State ONE purpose of each of the following diesel fuel system components:

2.6.1 Lift pump

___ 2

2.6.2 Glow plugs

2.6.3 Leak-off pipes

 $(3 \times 1) \qquad (3)$

2.7 FIGURE 2 shows a diagram of a diesel fuel system used on a vehicle. Name the components indicated by writing only the answer next to the letter (A–E) in the ANSWER BOOK.

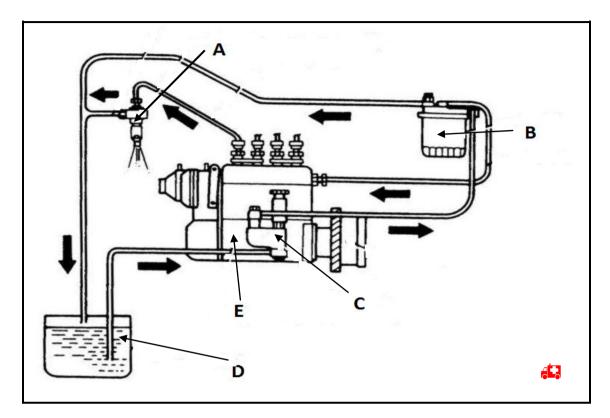


FIGURE 2 (5) [23]

3.1 Choose a description from COLUMN B that matches an item in COLUMN A. Write only the letter (A–F) next to the question number (3.1.1–3.1.6) in the ANSWER BOOK.

	COLUMN A		COLUMN B
3.1.1	Shift forks	Α	holds transmission in gear
3.1.2	Shift linkage	В	fit into grooves cut in outside of synchro collar
3.1.3	Detent mechanism	С	internal shift rail or external rod
3.1.4	Spring tension	D	various patterns for different
3.1.5	Interlock mechanism		transmissions
3.1.6	Shift patterns	Е	holds detent balls into detent notches in shift rail
			III SIIIIL IAII
		F	prevents selection of two gears at once

 $(6 \times 1) \qquad (6)$

3.2 FIGURE 3 shows a diagram of a propeller shaft assembly used on a vehicle. Name the parts indicated by writing only the answer next to the letter (A–F) in the ANSWER BOOK.

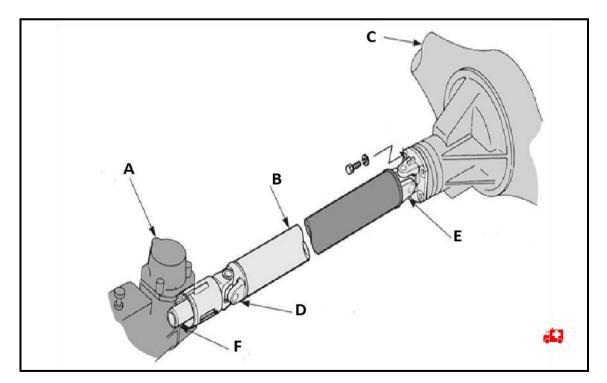


FIGURE 3 (6)

- 3.3 State ONE function of EACH of the following components:
 - 3.3.1 Slip joint
 - 3.3.2 Hooke's type universal joint

 $(2 \times 1) \qquad (2)$

- 3.4 Give TWO reasons why a divided Hotchkiss is used on heavy vehicles. (2)
- 3.5 Give TWO reasons for the use of a differential unit. (2)
- 3.6 FIGURE 4 shows a diagram of a 1–2 synchronising unit used on a four-speed gearbox. Name the parts indicated by writing only the answer next to the letter (A–E) in the ANSWER BOOK.

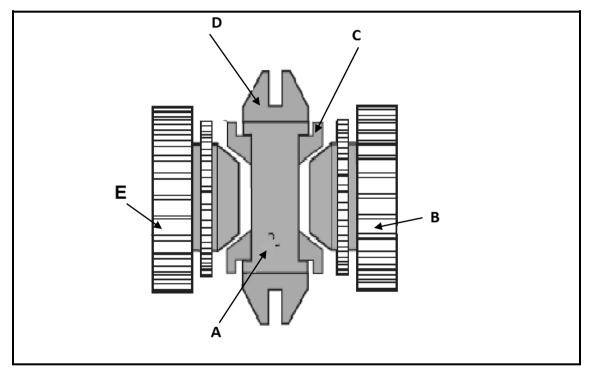


FIGURE 4 (5)

3.7 Give TWO reasons for the use of a synchronising unit. (2)

[25]

4.1 FIGURE 5 shows a diagram of a braking system. Name the parts indicated by writing only the answer next to the letter (A–F) in the ANSWER BOOK.

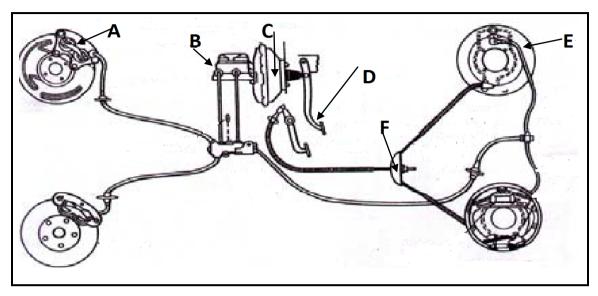


FIGURE 5 (6)

- 4.2 Give ONE purpose of each of the following braking components shown in FIGURE 5:
 - 4.2.1 Component C
 - 4.2.2 Component F

 $(2 \times 1) \qquad (2)$

4.3 FIGURE 6 shows a diagram of a residual pressure master cylinder. Name the parts indicated by writing only the answer next to the letter (A–F) in the ANSWER BOOK.

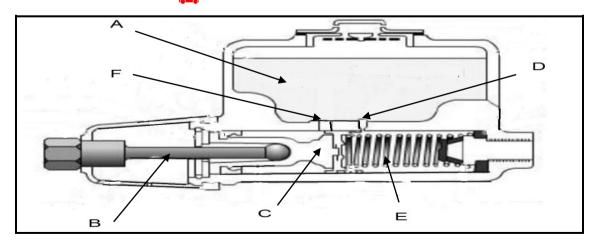


FIGURE 6 (6)

4.4 State TWO functions of a check valve.

(2) **[16]**

5.1 FIGURE 7 shows a diagram of a leaf spring used on a vehicle. Name the components indicated by writing only the answer next to the letter (A–C) in the ANSWER BOOK.

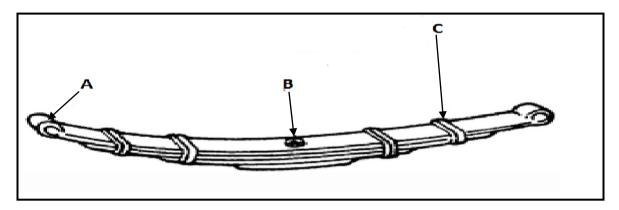


FIGURE 7 (3)

- 5.2 State ONE purpose of each of the following suspension components:
 - 5.2.1 Centre bolt
 - 5.2.2 Swinging shackle
 - 5.2.3 Rebound clips

 $(3 \times 1) \qquad (3)$

5.3 FIGURE 8 shows a diagram of a constant velocity joint. Name the components indicated by writing only the answer next to the letter (A–F) in the ANSWER BOOK.

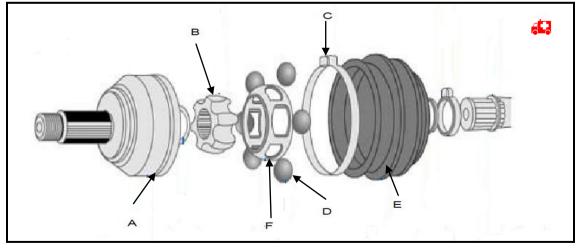


FIGURE 8 (6)

5.4 State TWO advantages of using a constant velocity joint.

(2) **[14]**

TOTAL: 100